



CD/K/022:2009  
ICS 71.100.80

## **EAST AFRICAN STANDARD**

---

**Chemicals used for treatment of water intended for human consumption — Sodium thiosulfate**

**EAST AFRICAN COMMUNITY**

---

*Draft for comments only — Not to be cited as East African Standard*

## Foreword

Development of the East African Standards has been necessitated by the need for harmonizing requirements governing quality of products and services in East Africa. It is envisaged that through harmonized standardization, trade barriers which are encountered when goods and services are exchanged within the Community will be removed.

In order to meet the above objectives, the EAC Partner States have enacted an East African Standardization, Quality Assurance, Metrology and Test Act, 2006 (EAC SQMT Act, 2006) to make provisions for ensuring standardization, quality assurance, metrology and testing of products produced or originating in a third country and traded in the Community in order to facilitate industrial development and trade as well as helping to protect the health and safety of society and the environment in the Community.

East African Standards are formulated in accordance with the procedures established by the East African Standards Committee. The East African Standards Committee is established under the provisions of Article 4 of the EAC SQMT Act, 2006. The Committee is composed of representatives of the National Standards Bodies in Partner States, together with the representatives from the private sectors and consumer organizations. Draft East African Standards are circulated to stakeholders through the National Standards Bodies in the Partner States. The comments received are discussed and incorporated before finalization of standards, in accordance with the procedures of the Community.

Article 15(1) of the EAC SQMT Act, 2006 provides that "Within six months of the declaration of an East African Standard, the Partner States shall adopt, without deviation from the approved text of the standard, the East African Standard as a national standard and withdraw any existing national standard with similar scope and purpose".

East African Standards are subject to review, to keep pace with technological advances. Users of the East African Standards are therefore expected to ensure that they always have the latest versions of the standards they are implementing.

© East African Community 2010 — All rights reserved\*

East African Community

P O Box 1096

**Arusha**

Tanzania

Tel: 255 27 2504253/8

Fax: 255-27-2504481/2504255

E-Mail: [eac@eachq.org](mailto:eac@eachq.org)

Web: [www.each.int](http://www.each.int)

## Introduction

In the preparation of this East African Standard, the following source was consulted extensively:

BS EN 12125:2005, *Chemicals used for treatment of water intended for human consumption — Sodium thiosulfate*

Assistance derived from this source and others inadvertently not mentioned is hereby acknowledged.

Draft for comments only — Not to be cited as East African Standard

# **Chemicals used for treatment of water intended for human consumption — Sodium thiosulfate**

The European Standard EN 12125:2005 has the status of a  
British Standard

ICS 71.100.80

## National foreword

This British Standard is the official English language version of EN 12125:2005. It supersedes BS EN 12125:1999 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CII/59, Chemicals for drinking water treatment, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

The United Kingdom, as a member of CEN, is obliged to publish EN 12125 as a British Standard. However, attention is drawn to the fact that the United Kingdom voted against the approval of EN 12125. The main reason for this disapproval was that no information has been provided on the preparation of the test solution or the calculation of the result for the determination of sulfate, in order to apply the method referred to in 5.2.2.1 which is intended for the analysis of water.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled "International Standards Correspondence Index", or by using the "Search" facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

### Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 18, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

### Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 28 April 2006

© BSI 2006

ISBN 0 580 47480 1

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

EN 12125

June 2005

ICS 71.100.80

Supersedes EN 12125:1998

English version

## Chemicals used for treatment of water intended for human consumption - Sodium thiosulfate

Produits chimiques utilisés pour le traitement de l'eau destinée à la consommation humaine - Thiosulfate de sodium

Produkte zur Aufbereitung von Wasser für den menschlichen Gebrauch - Natriumthiosulfat

This European Standard was approved by CEN on 12 May 2005.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

## Contents

Page

<b>Foreword</b> .....	<b>3</b>
<b>Introduction</b> .....	<b>4</b>
<b>1 Scope</b> .....	<b>5</b>
<b>2 Normative references</b> .....	<b>5</b>
<b>3 Description</b> .....	<b>5</b>
<b>4 Purity criteria</b> .....	<b>7</b>
<b>Table 1 – Chemical parameters</b> .....	<b>8</b>
<b>5 Test methods</b> .....	<b>8</b>
<b>Table 2 - Procedures for the determination of chemical parameters</b> .....	<b>9</b>
<b>Figure 1 — Calculation of the element concentration in the test solution</b> .....	<b>11</b>
<b>Figure 2 – Calculation of the element concentration in the blank solution</b> .....	<b>12</b>
<b>Table 3 — Standard solution</b> .....	<b>14</b>
<b>6 Labelling – Transportation – Storage</b> .....	<b>14</b>
<b>Annex A (informative) General information on sodium thiosulfate</b> .....	<b>16</b>
<b>Bibliography</b> .....	<b>18</b>

## Foreword

This European Standard (EN 12125:2005) has been prepared by Technical Committee CEN/TC 164 "Water supply", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2005, and conflicting national standards shall be withdrawn at the latest by December 2005.

This document supersedes EN 12125:1998.

Significant technical differences between this edition and EN 12125:1998 are as follows:

- deletion of the reference to EU Directive 80/778/EEC of 15 July 1980 in order to take account of the latest Directive in force (see [1]).

According to the GEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

## EN 12125:2005 (E)

### Introduction

In respect of potential adverse effects on the quality of water intended for human consumption, caused by the product covered by this European Standard:

- a) this European Standard provides no information as to whether the product may be used without restriction in any of the Member States of the EU or EFTA;
- b) it should be noted that, while awaiting the adoption of verifiable European criteria, existing national regulations concerning the use and/or the characteristics of this product remain in force.

**NOTE** Conformity with this European Standard does not confer or imply acceptance or approval of the product in any of the Member States of the EU or EFTA. The use of the product covered by this European Standard is subject to regulation or control by National Authorities.

## 1 Scope

This European Standard is applicable to sodium thiosulfate used for treatment of water intended for human consumption. It describes the characteristics and specifies the requirements of sodium thiosulfate and refers to the corresponding analytical methods. It gives information for its use in water treatment.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the reference document (including any amendments) applies.

EN ISO 3696, *Water for analytical laboratory use - Specification and test methods (ISO 3696:1987)*

ISO 3165, *Sampling of chemical products for industrial use – Safety in sampling*

ISO 6206, *Chemical products for industrial use – Sampling – Vocabulary*

ISO 6353-1, *Reagents for chemical analysis - Part 1 General test methods*

ISO 8213, *Chemical products for industrial use – Sampling techniques – Solid chemical products in the form of particles varying from powders to coarse lumps*

ISO 10636, *Photography - Processing chemicals - Specifications for anhydrous sodium thiosulfate and sodium thiosulfate pentahydrate.*

ISO 22743 (in preparation) *Water quality -- Determination of sulfates by continuous flow analysis (CFA)*

## 3 Description

### 3.1 Identification

#### 3.1.1 Chemical name

Sodium thiosulfate.

#### 3.1.2 Synonym or common names

Sodium thiosulfate, sodium hyposulfite.

#### 3.1.3 Relative molecular mass

158,11 (anhydrous).

#### 3.1.4 Empirical formula

$\text{Na}_2\text{S}_2\text{O}_3$ .

#### 3.1.5 Chemical formula

$\text{Na}_2\text{S}_2\text{O}_3$ .

## EN 12125:2005 (E)

### 3.1.6 CAS-Registry Number<sup>1)</sup>

7772-98-7 (anhydrous); 10102-17-7 (pentahydrate).

### 3.1.7 EINECS reference<sup>2)</sup>

231-867-5.

## 3.2 Commercial form

The product is a crystalline powder.

## 3.3 Physical properties

### 3.3.1 Appearance

The hydrated product is colourless crystal. The anhydrous product is a white powder.

### 3.3.2 Density

The particle density of the hydrated product is 1,69 g/cm<sup>3</sup> to 1,73 g/cm<sup>3</sup> at 20 °C.

### 3.3.3 Solubility in water

The solubility of the product in water is 700 g/l at 20 °C (anhydrous); for pentahydrate : 2910 g/l at 45 °C.

### 3.3.4 Vapour pressure

Not applicable.

### 3.3.5 Boiling point at 100 kPa<sup>3)</sup>

Not applicable.

### 3.3.6 Crystallisation point

The product starts to decompose at 45 °C to 50 °C.

### 3.3.7 Specific heat

Not known.

### 3.3.8 Viscosity, dynamic

Not applicable.

---

1) Chemical Abstracts Service Registry Number.

2) European Inventory of Existing Commercial Chemical Substances.

3) 100 kPa = 1 bar.

**3.3.9 Critical temperature**

Not applicable.

**3.3.10 Critical pressure**

Not applicable.

**3.3.11 Physical hardness**

Not applicable.

**3.4 Chemical properties**

The pH value of a diluted aqueous solution of sodium thiosulfate is approximately neutral (6,5 to 8). Sodium thiosulfate dissolves silver halogenids and other silver salts.

At elevated temperatures (> 50 °C) sulfur dioxide is generated.

Sodium thiosulfate releases sulfur dioxide when mixed with acids.

Sodium thiosulfate reacts violently with oxidizing agents; e.g. with sodium hypochlorite or hydrogen peroxide. It shall not get into contact with acids, iodine, lead and silver salts.

**4 Purity criteria****4.1 General**

This European Standard specifies the minimum purity requirements for sodium thiosulfate used for the treatment of water intended for human consumption. Limits are given for impurities commonly present in the product. Depending on the raw material and the manufacturing process other impurities may be present and, if so, this shall be notified to the user and when necessary to relevant authorities.

**NOTE** Users of this product should check the national regulations in order to clarify whether it is of appropriate purity for treatment of water intended for human consumption, taking into account raw water quality, required dosage, contents of other impurities and additives used in the product not stated in this product standard.

Limits have been given for impurities and chemical parameters where these are likely to be present in significant quantities from the current production process and raw materials. If the production process or raw materials leads to significant quantities of impurities, by-products or additives being present, this shall be notified to the user.

**4.2 Composition of commercial product**

The concentration of sodium thiosulfate anhydrous shall not be less than a mass fraction of 95 % of  $\text{Na}_2\text{S}_2\text{O}_3$ .

The concentration of sodium thiosulfate pentahydrate shall not be less than a mass fraction of 95% of  $\text{Na}_2\text{S}_2\text{O}_3 \cdot 5 \text{H}_2\text{O}$ .

**4.3 Impurities and main by-products**

The content of sodium sulfate shall not exceed a mass fraction of 5 % .

#### 4.4 Chemical parameters

The product shall conform to the requirements specified in Table 1.

**Table 1 – Chemical parameters**

Parameter		Limit mg/kg of commercial product
Antimony (Sb)	max.	2
Arsenic (As)	max.	0,5
Cadmium (Cd)	max.	0,1
Chromium (Cr)	max.	5
Lead (Pb)	max.	5
Mercury (Hg)	max.	0,1
Nickel (Ni)	max.	5
Selenium (Se)	max.	2
NOTE Pesticides and polycyclic aromatic hydrocarbons and cyanides (CN ) are not relevant in sodium thiosulfate because the raw materials used in the manufacturing are free of them. For parametric values of sodium thiosulfate on trace metal content in drinking water, see [1].		

## 5 Test methods

### 5.1 Sampling

Observe the general recommendations of ISO 3165 and take account of ISO 6206. Prepare the laboratory sample(s) required by the relevant procedure described in ISO 8213.

### 5.2 Analyses

#### 5.2.1 Main product

The sodium thiosulfate content shall be determined in accordance with ISO 10636.

#### 5.2.2 Impurities

##### 5.2.2.1 Sulfate

The content of sodium sulfate ( $\text{Na}_2\text{SO}_4$ ) shall be determined in accordance with ISO 22743.

### 5.2.3 Chemical parameters

#### 5.2.3.1 General

The content of chemical parameters shall be determined using the procedures specified in Table 2:

**Table 2 - Procedures for the determination of chemical parameters**

Element	Reference	Method	Wavelength (nm)	Flame
As	see 5.2.3.3	Hydride AAS	193,7	n.a.
Sb	see 5.2.3.3	Hydride AAS	217,6	n.a.
Cd	ISO 6353-1 GM 29 see 5.2.3.2	AAS	228,8	air- acetylene
Cr	ISO 6353-1 GM 29 see 5.2.3.2	AAS	357,8	air- acetylene
Pb	ISO 6353-1 GM 29 see 5.2.3.2	AAS	217,0 or 283,3	air- acetylene
Ni	ISO 6353-1 GM 29 see 5.2.3.2	AAS	232,0	oxidizing acetylene- air
Se	see 5.2.3.3	Hydride AAS	196,0	n.a.
Hg	in accordance with ISO 5993	flameless AAS	253,6	n.a.
AAS = Atomic Absorption Spectroscopy n.a. = not applicable				

#### 5.2.3.2 Determination of cadmium (Cd), chromium (Cr), lead (Pb) and nickel (Ni)

##### 5.2.3.2.1 Principle

The elements cadmium (Cd), chromium (Cr), lead (Pb) and nickel (Ni) are determined using atomic absorption spectrometry with the standard additions technique.

##### 5.2.3.2.2 Reagents

All reagents shall be of a recognized analytical grade and the water used shall conform to the grade 3 specified in EN ISO 3696.

##### 5.2.3.2.2.1 Standard solution (100 µg/l Cd, Cr, Pb or Ni)

The standard solution shall be freshly prepared on the day of use by individual dilution of a stock solution. This stock solution with a Cd, Cr, Pb or Ni content of at least 1 mg/l shall be made by dilution of standard solutions of Cd, Cr, Pb and Ni which are available from all major suppliers of laboratory chemicals. This stock solution shall be kept in containers of tetrafluoroethylene-hexafluoropropylene copolymer (FEP), polytetrafluoroethylene (PTFE) or polyethylene (PE).

## EN 12125:2005 (E)

NOTE The stock solution should not be kept for longer than four weeks.

### 5.2.3.2.3 Apparatus

Ordinary laboratory apparatus and the following:

**5.2.3.2.3.1 Atomic absorption spectrometer** with the measurement parameters specified in Table 2.

### 5.2.3.2.4 Procedure

#### 5.2.3.2.4.1 Test portion

Weigh 1 g (*m*) to the nearest 0,01 mg of the laboratory sample into a 100 ml one-mark volumetric flask and make up to the mark at 20 °C with water.

#### 5.2.3.2.4.2 Determination

The reference solutions shall be made by spiking the sample with the standard solutions, which contain stepwise increasing contents of the elements to be determined.

NOTE The amount of internal standard to be added can be estimated from a preliminary investigation, determining roughly the element content of the test sample from simple calibration.

The steps in which internal standards have to be added shall be at least as high as the estimated content of the test sample. With the spectrometer (5.2.3.2.3.1) carry out the measurement with the parameters specified in Table 3 in accordance with the manufacturer's instructions.

Repeat the procedure with all reagents and the same volume of standard solution to be added using water in place of the sample as a blank determination.


### 5.2.3.2.5 Expression of results

Prepare a calibration curve using the measured absorbances of the spiked measurement solutions.

Read the concentration of each element in the test solution by extrapolation of the correlation line to absorbance  $A = 0$  (see Figure 1). Similarly determine the element concentration of the blank solution (see Figure 2) and subtract from the result obtained for the test solution.

Alternatively, the evaluation can be carried out by linear regression. Additional dilution steps shall be compensated in the calculation.

The interim result (*y*) expressed in micrograms per litre is converted to give the final concentration according to 5.2.3.2.6.

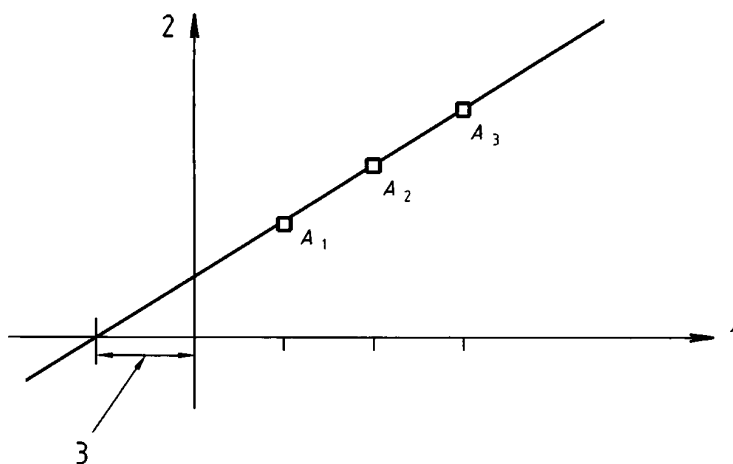

**Key**

- 1 Concentration of added standard in micrograms per litre
  - 2 Absorbance A
  - 3 Concentration in the test solution in micrograms per litre
- A.1, A.2, A.3 Spiking

**Figure 1 — Calculation of the element concentration in the test solution**

**EN 12125:2005 (E)**

**5.2.3.2.6 Calculation**

From the interim result ( $y$ ) (see 5.2.3.2.5), the content,  $C_3$ , of each element in the laboratory sample, expressed in milligrams per kilogram of a mass fraction of 100 % sodium thiosulfate is given by the following equation:

$$C_3 = \frac{y \times V \times 100 \times 1000}{m \times C_1} \tag{1}$$


where

$y$  is the interim result (5.2.3.2.5);

$V$  is the volume, expressed in millilitres, of the test solution;

$m$  is the mass, expressed in grams, of the test portion;

$C_1$  is the concentration, expressed in mass fraction in % sodium thiosulfate (see 5.2.1).

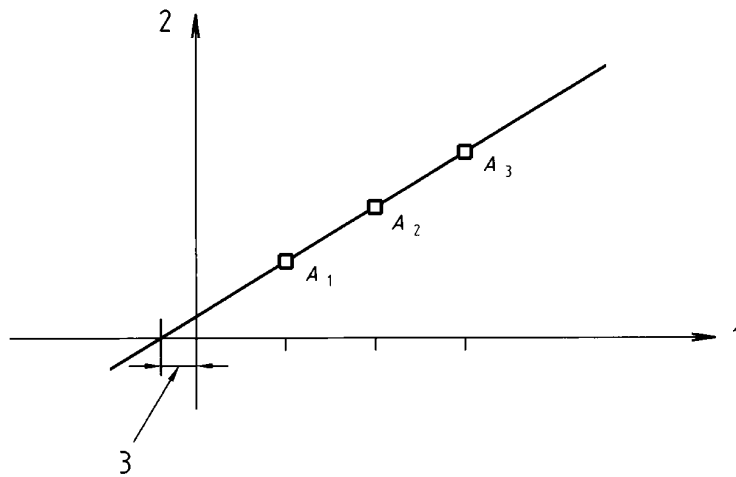

**Key**

1 Concentration of added standard in micrograms per litre.

2 Absorbance A.

3 Concentration in the blank solution in micrograms per litre.

A.1, A.2, A.3 Spiking.

**Figure 2 – Calculation of the element concentration in the blank solution**

### 5.2.3.3 Determination of arsenic (As), antimony (Sb) and selenium (Se)

#### 5.2.3.3.1 Principle

The elements arsenic, antimony, and selenium are determined by hydride-atomic absorption spectrometry. The elements are reduced by reducing agents (sodium borohydride ( $\text{NaBH}_4$ )) to form the hydrides. These volatile compounds flow through the heated measuring cuvette of an atomic absorption spectrometer where the content of the individual element is determined.

#### 5.2.3.3.2 Reagents

**5.2.3.3.2.1 Hydrochloric acid**, high purity analytical grade, mass fraction of 30 %, density  $\rho = 1,15 \text{ g/ml}$ .

**5.2.3.3.2.2 Preliminary reduction agent.**

Dissolve 10 g sodium iodide and 100 g *L*-ascorbic acid in 1 000 ml of water.

**5.2.3.3.2.3 Reduction agent.**

Dissolve with water  $\text{NaBH}_4$  and  $\text{NaOH}$  in concentrations specified in the manufacturer's handbook for the spectrometer.

**5.2.3.3.2.4 Standard solution (100  $\mu\text{g/l}$  As, Sb or Se)**

The standard solution shall be freshly prepared on the day of use by individual dilution of a stock solution. This stock solution with an As, Sb or Se content of at least 1 mg/l shall be made by dilution of standard solutions of Se, As and Sb which are available from all major suppliers of laboratory chemicals. This stock solution shall be kept in containers of tetrafluoroethylene-hexafluoropropylene copolymer (FEP), polytetrafluoroethylene (PTFE) or polyethylene (PE).

NOTE The stock solution should not be kept for longer than four weeks.

#### 5.2.3.3.3 Apparatus

**5.2.3.3.3.1 One one-mark volumetric flask, 100 ml.**

**5.2.3.3.3.2 Nine one-mark volumetric flasks, 10 ml.**

**5.2.3.3.3.3 Pipettes 5 ml, 10 ml and 20 ml.**

**5.2.3.3.3.4 Three one-mark volumetric flasks, 50 ml.**

**5.2.3.3.3.5 Micropipettes, volume adjustable to maximum 500  $\mu\text{l}$ .**

**5.2.3.3.3.6 Atomic absorption spectrometer** with the measurement parameters specified in Table 2.

The width of the slit, the measuring time, rinsing with argon before and after the measurement and the reaction time shall be adjusted in accordance with the manufacturer's instructions. The background compensation shall be activated for the measurement of As and Sb, but not for the measurement of Se.

#### 5.2.3.3.4 Procedure

For As (procedure for Sb and Se in parentheses if different from As procedure): weigh a test portion of 1 g to the nearest 0,01mg and transfer it to a 100 ml one-mark volumetric flask (5.2.3.3.3.1) and make up to the mark at 20 °C with water. Pipette 10 ml (Sb: 10 ml; Se: 20 ml) of this solution into a 50 ml one-mark volumetric

**EN 12125:2005 (E)**

flask (5.2.3.3.3.4) and add 5 ml HCl (5.2.3.3.2.1) and 5 ml preliminary reduction agent (5.2.3.3.2.2). Do not add preliminary reduction agent to the flasks for Sb and Se determination. Allow 3 h for reaction to occur and fill to the mark with water. Pipette 5 ml of this solution into three 10 ml one-mark volumetric flasks (5.2.3.3.3.2) labelled A, B, C. Add 0,8 ml of HCl (5.2.3.3.2.1) to each flask For the purpose of internal calibration add those quantities of standard solutions (5.2.3.3.2.4) as given in Table 3 to the flasks B and C. With the spectrometer (5.2.3.3.3.6), carry out the measurement with the addition of the reduction agent (5.2.3.3.2.3) and the parameters of measurement in accordance with the manufacturer's instructions for the spectrometer.

Repeat the procedure with all reagents and the same volume of standard solution to be added using water in place of the sample as a blank determination.

**Table 3 — Standard solution**

	Volume of standard solution to be added		
	As	Sb	Se
<b>Flask B</b>	50 µl	100 µl	200 µl
<b>Flask C</b>	100 µl	200 µl	500 µl

**5.2.3.3.5 Expression of results**

See 5.2.3.2.5.

**5.2.3.3.6 Calculation**

See 5.2.3.2.6.

**6 Labelling – Transportation – Storage**

**6.1 Means of delivery**

Sodium thiosulfate shall be delivered in paper bags with polyethylene lining.

In order that the purity of the product is not affected, the means of delivery shall not have been used previously for any different product or it shall have been specially cleaned and prepared before use.

**6.2 Risk and safety labelling according to the EU Directives <sup>4)</sup>**

At the date of the publication of this European Standard no labelling requirements apply to sodium thiosulfate.

**NOTE** Annex I of the Directive 67/548/EEC on Classification, packaging and labelling of dangerous substances and its amendments and adaptation in the European Union contains a list of substances classified by the EU. Substances not in this Annex I should be classified on the basis of their intrinsic properties according to the criteria in the Directive by the person responsible for the marketing of the substance.

**6.3 Transportation regulations and labelling**

Sodium thiosulfate is not classified as a dangerous product for road, rail, sea and air transportation.

---

<sup>4)</sup> See [2].

#### **6.4 Marking**

The marking shall include the following:

- name "sodium thiosulfate", trade name and grade;
- net mass;
- name and the address of supplier and/or manufacturer;
- statement "this product conforms to EN 12125".

#### **6.5 Storage**

##### **6.5.1 Long term stability**

Product is stable when stored in containers in a cool and dry place.

##### **6.5.2 Storage incompatibilities**

The product shall be kept away from acids, such as hydrochloric acid and sulfuric acid, to avoid the risk of sulfur dioxide evolution.

The product shall be kept away from oxidizing substances, such as sodium hypochlorite, hydrogen peroxide.

## Annex A (informative)

### General information on sodium thiosulfate

#### A.1 Origin

##### A.1.1 Raw materials

Sodium thiosulfate is manufactured from sodium hydroxide, sodium hydrogen sulfite (solution) and sulfur.


##### A.1.2 Manufacturing process

The raw materials react under pressure at elevated temperatures.

#### A.2 Use

##### A.2.1 Function

Sodium thiosulfate is used as a reducing agent to remove excess chlorine, chlorine dioxide or ozone in the drinking water:



##### A.2.2 Form in which it is used

Sodium thiosulfate is used as an aqueous solution with a content of mass fraction of 40 %  $\text{Na}_2 \text{S}_2 \text{O}_3$ .

##### A.2.3 Treatment dose

The treatment dose depends on the content of oxidants in the water. For chlorine, for example, in water the stoichiometric dose is 0,56 mg of  $\text{Na}_2\text{S}_2\text{O}_3$  for 1 mg of  $\text{Cl}_2$ , but in practice an excess over the stoichiometric dose can be required.

##### A.2.4 Means of application

It is usually applied using a metering pump.

##### A.2.5 Secondary effects

The use of sodium thiosulfate increases content of sodium and can consume oxygen dissolved in the water.

##### A.2.6 Removal of excess product

The excess product is removed by oxidation.

### **A.3 General rules relating to safety**

#### **A.3.1 Rules for safe handling and use**

The supplier will provide current safety instructions.

#### **A.3.2 Emergency procedures**

##### **A.3.2.1 First aid**

In case of contact with the eyes or the skin it is recommended to rinse with plenty of water.

In case of ingestion it is recommended to seek immediately medical advice.

##### **A.3.2.2 Spillage**

It is recommended to collect and to remove any spillage avoiding the formation of dust.

Any remaining product can be flushed away with plenty of water to which an oxidizing agent is added.

##### **A.3.2.3 Fire**

The product is not combustible.

Decomposition can be caused by fire with release of sulfur dioxide. It is recommended to wear suitable respiratory equipment.

There are no restrictions on extinguishing media in fire situations.

## **Bibliography**

- [1] 98/83/EC, *Council Directive of 3 November 1998 on the quality of water intended for human consumption.*
- [2] 67/548/EEC, *Council Directive of 27<sup>th</sup> June 1967 on the approximation of the laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances and its amendments and adaptations.*



BSI  
389 Chiswick High Road  
London  
W4 4AL

---

## BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.  
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.  
Fax: +44 (0)20 8996 7001. Email: [orders@bsi-global.com](mailto:orders@bsi-global.com). Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.  
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: [info@bsi-global.com](mailto:info@bsi-global.com).

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.  
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.  
Email: [membership@bsi-global.com](mailto:membership@bsi-global.com).

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.  
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.  
Email: [copyright@bsi-global.com](mailto:copyright@bsi-global.com).

---

*Draft for comments only — Not to be cited as East African Standard*