



CD/K/164-4:2009
ICS 13.200;93.080.30

EAST AFRICAN STANDARD

Road restraint systems — Part 4: Performance classes, impact test acceptance criteria and test methods for terminals and transitions of safety barriers

EAST AFRICAN COMMUNITY

Foreword

Development of the East African Standards has been necessitated by the need for harmonizing requirements governing quality of products and services in East Africa. It is envisaged that through harmonized standardization, trade barriers which are encountered when goods and services are exchanged within the Community will be removed.

In order to meet the above objectives, the EAC Partner States have enacted an East African Standardization, Quality Assurance, Metrology and Test Act, 2006 (EAC SQMT Act, 2006) to make provisions for ensuring standardization, quality assurance, metrology and testing of products produced or originating in a third country and traded in the Community in order to facilitate industrial development and trade as well as helping to protect the health and safety of society and the environment in the Community.

East African Standards are formulated in accordance with the procedures established by the East African Standards Committee. The East African Standards Committee is established under the provisions of Article 4 of the EAC SQMT Act, 2006. The Committee is composed of representatives of the National Standards Bodies in Partner States, together with the representatives from the private sectors and consumer organizations. Draft East African Standards are circulated to stakeholders through the National Standards Bodies in the Partner States. The comments received are discussed and incorporated before finalization of standards, in accordance with the procedures of the Community.

Article 15(1) of the EAC SQMT Act, 2006 provides that "Within six months of the declaration of an East African Standard, the Partner States shall adopt, without deviation from the approved text of the standard, the East African Standard as a national standard and withdraw any existing national standard with similar scope and purpose".

East African Standards are subject to review, to keep pace with technological advances. Users of the East African Standards are therefore expected to ensure that they always have the latest versions of the standards they are implementing.

© East African Community 2010 — All rights reserved*

East African Community

P O Box 1096

Arusha

Tanzania

Tel: 255 27 2504253/8

Fax: 255-27-2504481/2504255

E-Mail: eac@eachq.org

Web: www.each.int

* © 2010 EAC — All rights of exploitation in any form and by any means reserved worldwide for EAC Partner States' NSBs.

Introduction

In the preparation of this East African Standard, the following source was consulted extensively:

DD ENV 1317-4:2002, *Road restraint systems — Performance classes, impact test acceptance criteria and test methods for terminals and transitions of safety barriers*

Assistance derived from this source and others inadvertently not mentioned is hereby acknowledged.

Draft for comments only — Not to be cited as East African Standard

Road restraint systems —

Part 4: Performance classes, impact test acceptance criteria and test methods for terminals and transitions of safety barriers

ICS 13.200; 93.080.30

National foreword

This Draft for Development is the official English language version of ENV 1317-4:2001.

This publication is not to be regarded as a British Standard.

It is being issued in the Draft for Development series of publications and is of a provisional nature. It should be applied on this provisional basis, so that information and experience of its practical application may be obtained.

Comments arising from the use of this Draft for Development are requested so that UK experience can be reported to the European organization responsible for its conversion into a European Standard. A review of this publication will be initiated 2 years after its publication by the European organization so that a decision can be taken on its status at the end of its three-year life. The commencement of the review period will be notified by an announcement in *Update Standards*.

According to the replies received by the end of the review period, the responsible BSI Committee will decide whether to support the conversion into a European Standard, to extend the life of the prestandard or to withdraw it. Comments should be sent in writing to the Secretary of BSI Subcommittee B/509/1, Road restraint systems, at 389 Chiswick High Road, London W4 4AL, giving the document reference and clause number and proposing, where possible, an appropriate revision of the text.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

Summary of pages

This document comprises a front cover, an inside front cover, the ENV title page, pages 2 to 21 and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This Draft for Development, having been prepared under the direction of the Building and Civil Engineering Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 18 March 2002

© BSI 18 March 2002

ISBN 0 580 39245 7

Licensed Copy: Kebbs Information Resource Centre, Kenya Bureau of Standards, 16/07/2010 14:29, Uncontrolled Copy, (c) BSI

ICS 13.200; 93.080.30

English version

Road restraint systems - Part 4: Performance classes, impact test acceptance criteria and test methods for terminals and transitions of safety barriers

Dispositifs de retenue routiers - Partie 4: Classes de performance, critères d'acceptation des essais de choc et méthodes d'essai des extrémités et raccordements des glissières de sécurité

Rückhaltesysteme an Straßen - Teil 4: Leistungsklassen, Abnahmekriterien für Anprallprüfungen und Prüfverfahren für Anfangs-, End- und Übergangskonstruktionen von Schutzeinrichtungen

This European Prestandard (ENV) was approved by CEN on 30 September 2001 as a prospective standard for provisional application.

The period of validity of this ENV is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the ENV can be converted into a European Standard.

CEN members are required to announce the existence of this ENV in the same way as for an EN and to make the ENV available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the ENV) until the final decision about the possible conversion of the ENV into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	page
Foreword	3
Introduction	4
1 Scope.....	4
2 Normative references.....	4
3 Abbreviations	5
4 Terms and definitions.....	5
5 Terminals	7
6 Transitions	14
7 Test methods	16
Bibliography.....	21

Foreword

This European Prestandard has been prepared by Technical Committee CEN/TC 226 "Road equipment", the secretariat of which is held by AFNOR.

This European Prestandard under the general title "Road restraint systems" consists of the following Parts:

- Part 1: Terminology and general criteria for test methods;
- Part 2: Performance classes, impact test acceptance criteria and test methods for safety barriers;
- Part 3: Performance classes, impact test acceptance criteria and test methods for crash cushions;

The following Parts are not yet available but in course of preparation :

- Part 4: Performance classes, impact test acceptance criteria and test methods for terminals and transitions of safety barriers;
- Part 5: Product requirements, durability and evaluation of conformity;
- Part 6: Pedestrian restraint systems, pedestrian parapet.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to announce this European Prestandard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

The design purpose of safety barriers installed on roads is to contain or to contain and redirect errant vehicles that either leave the carriage way or are likely to encroach into the path of oncoming vehicles. EN 1317-2 deals with the impact performance of a safety barrier. However, difficulties arise in providing adequate safe terminations to the barrier. Consequently, terminals, which are defined as the beginning and/or end treatment of a safety barrier, are required to have specified impact performances. A terminal provides a smooth transition from no containment to the containment of the barrier, without introducing additional hazard for head on impacts.

Problems may also arise in the connection between two different safety barriers having consistent difference in stiffness. Transitions may be needed, that are required to have specified impact performances.

The objective of this prestandard is to lead to the harmonization of current National Regulations, to categorize them into performance classes and help develop new systems and improve existing systems.

This Part of the prestandard defines the classes of performance required of terminals and transitions for the restraint.

The impact severity of vehicles in collision with terminals and transitions is rated by the indices acceleration severity index (ASI), theoretical head impact velocity (THIV) and post-impact head deceleration (PHD).

Attention is drawn to the fact that the acceptance of a terminal or transition will require the successful completion of a series of tests (see Tables 1 to 8).

To ensure proper use of this Part of this series, it is essential to consider all the other relevant documents within the series. Additionally, the quality of manufacture, durability, satisfactory roadside installation and ease of maintenance are important safety criteria.

1 Scope

This European Prestandard specifies requirements for the performance of terminals and transitions. It defines performance classes and acceptance criteria for impact tests.

2 Normative references

This European Prestandard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Prestandard only when incorporated in it by amendments or revisions. For undated references the latest edition of the publication referred to applies (including amendments).

EN 1317-1:1998, *Road restraint systems - Part 1: Terminology and general technical criteria for test methods.*

EN 1317-2, *Road Restraint Systems - Part 2: Performance classes, impact test acceptance criteria and test methods for safety barriers.*

ISO 6487, *Road vehicles - Measurement techniques in impact tests - Instrumentation.*

ISO 10392, *Road vehicles with two axles - Determination of centre of gravity.*

3 Abbreviations

ASI	Acceleration severity index;
THIV	Theoretical head impact velocity;
PHD	Post-impact head deceleration;
VCDI	Vehicle cockpit deformation index;
U	Terminal on upstream position;
D	Terminal on downstream position;
A	Terminal on upstream as well as downstream position;
L	Length of terminal or transition.

Impact speed classes abbreviations are:

80	80 km/h
100	100 km/h
110	110 km/h

Test vehicle mass codes are:

1	900 kg
2	1300 kg
3	1500 kg

4 Terms and definitions


4.1

terminal

treatment of the beginning and/or the end of a safety barrier

NOTE In addition it can provide an anchorage for the barrier system. The length L of a terminal is the longitudinal distance from the nose to the end of the terminal, i.e. to the beginning of the barrier. The length of a terminal is shown diagrammatically in Figure 1 for two alternative shapes.

ENV 1317-4:2001 (E)

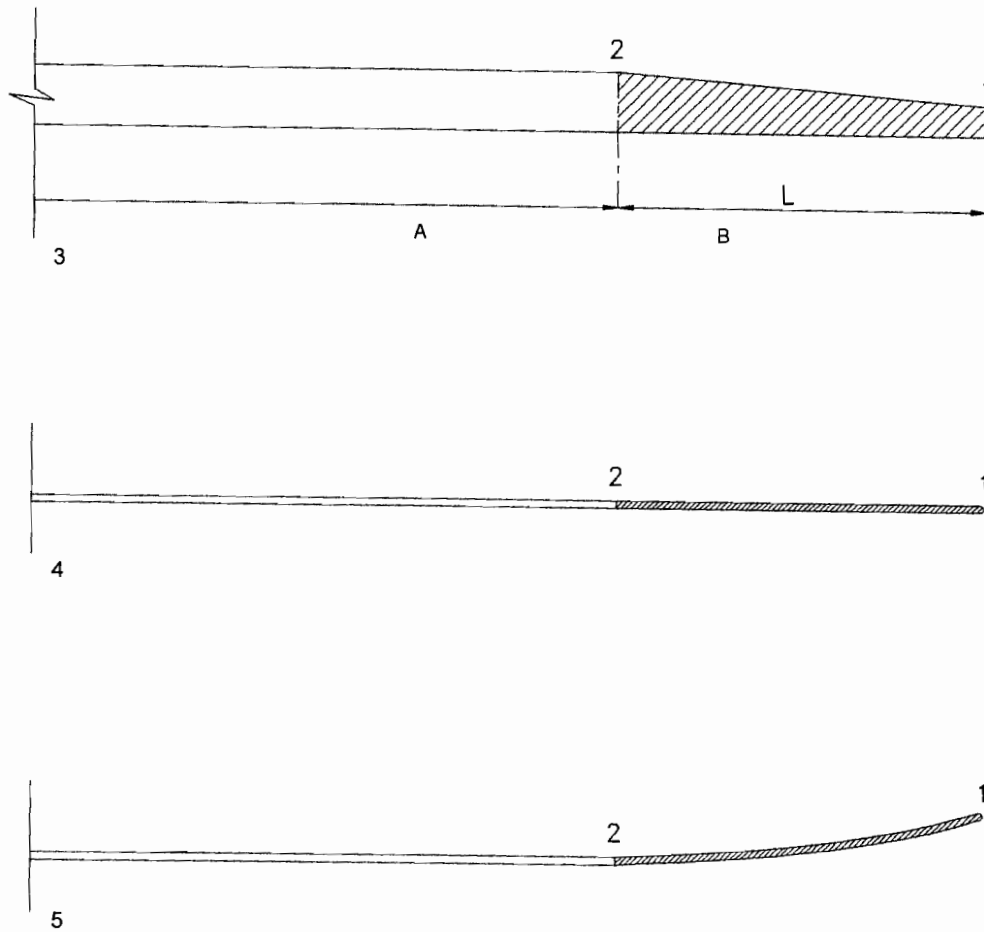

Key

- A Barrier
- B Terminal
- 3 Side view
- 4 Plan view – a)
- 5 Plan view – b)

Figure 1 – Length of a Terminal with two alternative shapes (a and b)

4.2

system type tested terminal

multiple performance product that can be assembled to form different models from the same set of components, to obtain different performances, with the same working mechanism for the system and for its components


4.3

transition

so that interface between two safety barriers of different cross section or different lateral stiffness, the containment is continuous

NOTE 1 The purpose of transitions is to provide a gradual change from the first to the second barrier, to prevent the hazards of an abrupt variation. A transition is designed to connect two specified barriers. The

length of a transition is the distance between the ends of the two barriers connected by the transition, as shown schematically in Figure 2.

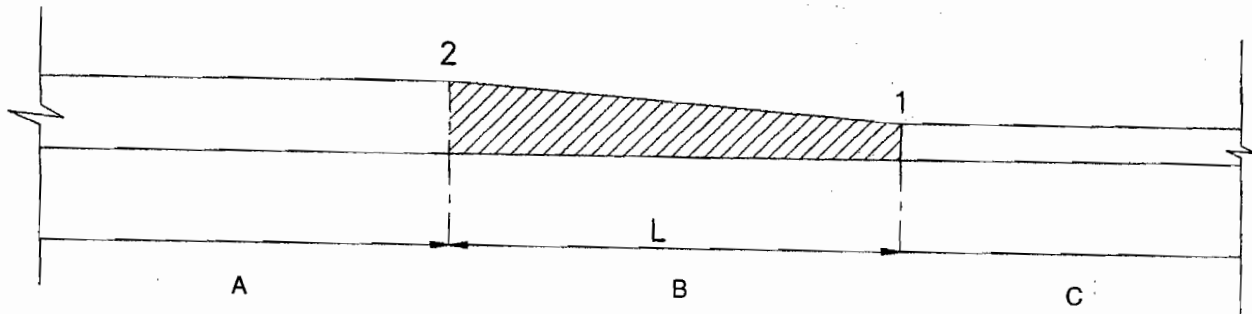

Key

- A Barrier B
- B Transition
- C Barrier A

Figure 2 – Length of a Transition

NOTE 2 The junction between two barriers having the same cross-section and the same material, and differing in the working width no more than one class, is not be considered a transition.

4.4

removable barrier section

part of barrier which allow for quick removal and reinstallation for emergency reasons provision may be required for barrier sections to be temporarily opened, but yet having containment performances

NOTE If such a barrier has a length not exceeding 40 m, it is be considered to be a special transition.

5 Terminals

5.1 Performance classes

Terminals shall be tested in accordance with Table 1. The length of the terminal shall conform to the design specification and be installed together with sufficient length of safety barrier so as to demonstrate the performance of the terminal.

A successfully tested installation at a given performance class, shall normally be considered as having met conditions of lower classes.

NOTE The acceptance tests required for each terminal performance class are reported in Table 1. These are classified according to an increasing containment capacity.

Table 1 - Terminals: vehicle impact test criteria and performance classes


Performance class	Location		Tests				
			Approach	Approach reference	Vehicle mass (kg)	Velocity (km/h)	Test code ¹⁾
P1	A		head on nose 1/4 offset to roadside	2	900	80	TT 2.1.80
P2	A	U	head on nose 1/4 offset to roadside	2	900	80	TT 2.1.80
			side, 15° 2/3 L	4	1 300	80	TT 4.2.80
P3	A	D	side, 165° 1/2 L	5	900	80	TT 5.1.80
			head on nose 1/4 offset to roadside	2	900	100	TT 2.1.100
P4	A	U	head-on centre	1	1 300	100	TT 1.2.100
			side, 15° 2/3 L	4	1 300	100	TT 4.2.100
			side, 165° 1/2 L	5	900	100	TT 5.1.100
P4	A	D	side, 165° 1/2 L	5	900	100	TT 5.1.100
			head on nose 1/4 offset to roadside	2	900	100	TT 2.1.100
			head-on centre	1	1 500	110	TT 1.3.110
			side, 15° 2/3 L	4	1 500	110	TT 4.3.110

¹⁾ Test code notation is as follows:


TT	1	2	100
Test of Terminal	Approach	Test vehicle mass	Impact speed

NOTE 1 To avoid ambiguity, the numbering of the approach path in Table 1 and in Figure 3 is the same as in EN 1317-3; approach 3 is present in EN 1317-3 as test 3 for crash cushions, but it is not required for Terminals.

NOTE 2 The test with approach 5 is not run for a flared terminal when, at the relevant impact point, the angle (α) of the vehicle path to the traffic face of the terminal is less than 5°.

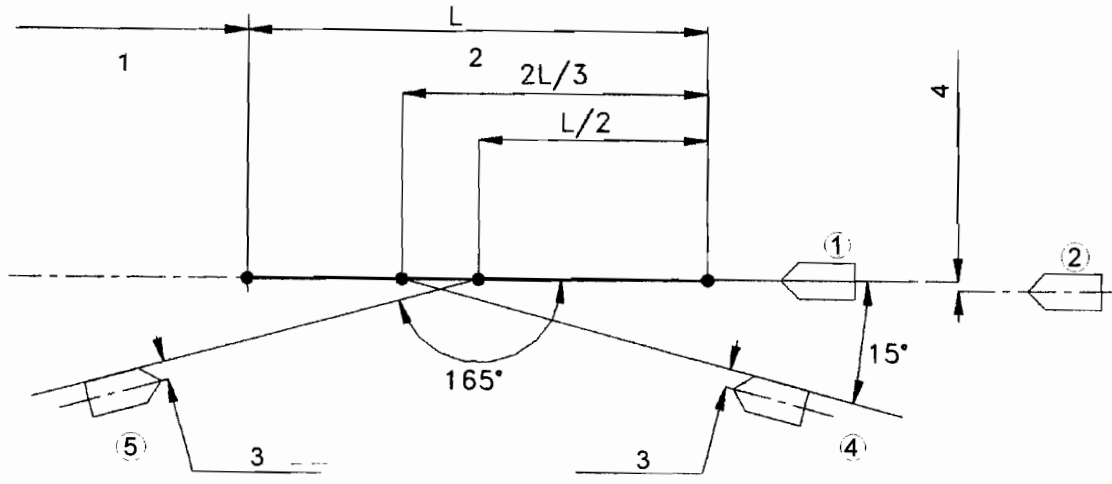

a)

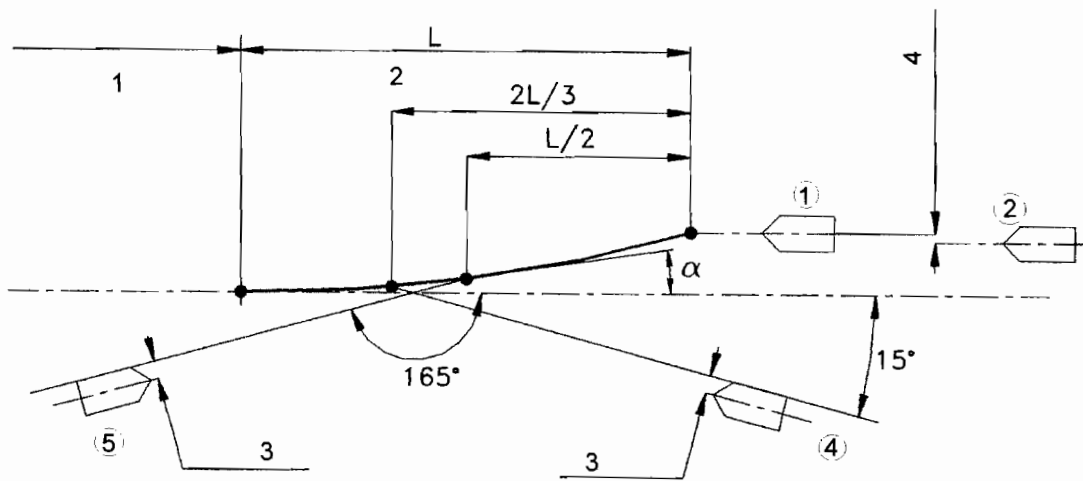

b)

Key

- ① Approach 1
- ② Approach 2
- ④ Approach 4
- ⑤ Approach 5
- 1 Barrier
- 2 Terminal
- 3 1/2 vehicle width
- 4 1/4 vehicle width

Figure 3 – Vehicle approach paths with two alternative shapes of Terminal (a and b)

5.2 Tests for system type tested terminals

A group of models covering a range of performance classes can be derived from a single *Parent Terminal*, once the latter has been successfully tested to this prestandard.

Provided that the models in the group:

- a) are assembled from the same set of components;
- b) have the same product name;
- c) have the same working mechanism for the system and for the components,

the group, specified by the drawings of all the models, may be tested as a single product with multiple performance possibilities. If the tests specified by the group test matrix are passed, the terminal shall be accepted as a multiple performance product, i.e. each model is accepted in the relevant performance class.

If the parent Terminal belongs to the highest performance class the test matrix shall be the one shown in Table 2 or 3, depending on the highest performance class of the group.

Table 2 – Parent Terminal P4

Performance class	Tests
P4	All tests
P3	TT 1.2.100
P2	TT 2.1.80

Table 3 – Parent terminal P3 (shape a)

Performance class	Tests
P3	All tests
P2	TT 2.1.80

If the parent terminal belongs to the performance class P3 and the group covers also the class P4 the test matrix shall be in accordance with Table 4.

Table 4 – Parent terminal P3 (shape b)

Performance Class	Tests
P4	TT 2.1.100 TT 1.3.110
P3	All tests
P2	TT 2.1.80

5.3 Impact severity

Vehicle occupant impact severity shall be assessed by the indices ASI and THIV and PHD.

NOTE Vehicle deformation is indicated by the measure of Vehicle Cockpit Deformation Index (VCDI).

The indices are explained in EN 1317-1.

Two severity levels are determined in Table 5 as a function of the value of the ASI and THIV and PHD indices.

Table 5 - Terminals: Vehicle Impact Severity Classes

Impact severity classes	Index values		
A	ASI ≤ 1,0	THIV < 44 km/h in tests 1 and 2 THIV < 33 km/h in tests 4 and 5	PHD ≤ 20 g
B	ASI ≤ 1,4	THIV < 44 km/h in tests 1 and 2 THIV < 33 km/h in tests 4 and 5	PHD ≤ 20 g
<p>NOTE 1 Impact severity class A affords a greater level of safety for the occupants of an errant vehicle than class B and is preferred when other considerations are the same.</p> <p>NOTE 2 The limit value for THIV is higher in tests 1 and 2 because experience has shown that higher values can be tolerated by occupants in frontal impacts (also because of better passive safety in this direction). Such a difference in human tolerance between frontal and lateral impacts is already considered in the ASI parameter, which therefore does not need to be changed.</p>			

5.4 Lateral displacement of terminal

The permanent lateral displacement of the terminal shall be measured perpendicularly from the traffic face of the barrier and recorded in the test report.


To meet a class x or y the terminal, under all the tests required by its performance classes, shall remain within distances D_a and D_d from the traffic face of the barrier, as shown in Table 6.

Licensed Copy: KEBB Information Resource Centre, Kenya Bureau of Standards, 1011/12/10 17:22, 1011/12/10 17:22
 Copy, (c) BSI

Table 6 – Permanent lateral displacement zones for terminals

Class code		Displacement (m)	
x	1	D_a	0,5
	2		1,5
	3		3,0
y	1	D_d	1,0
	2		2,0
	3		3,5
	4		>3,5

The distances D_a and D_d are shown by lines A_a and A_d in Figure 4.

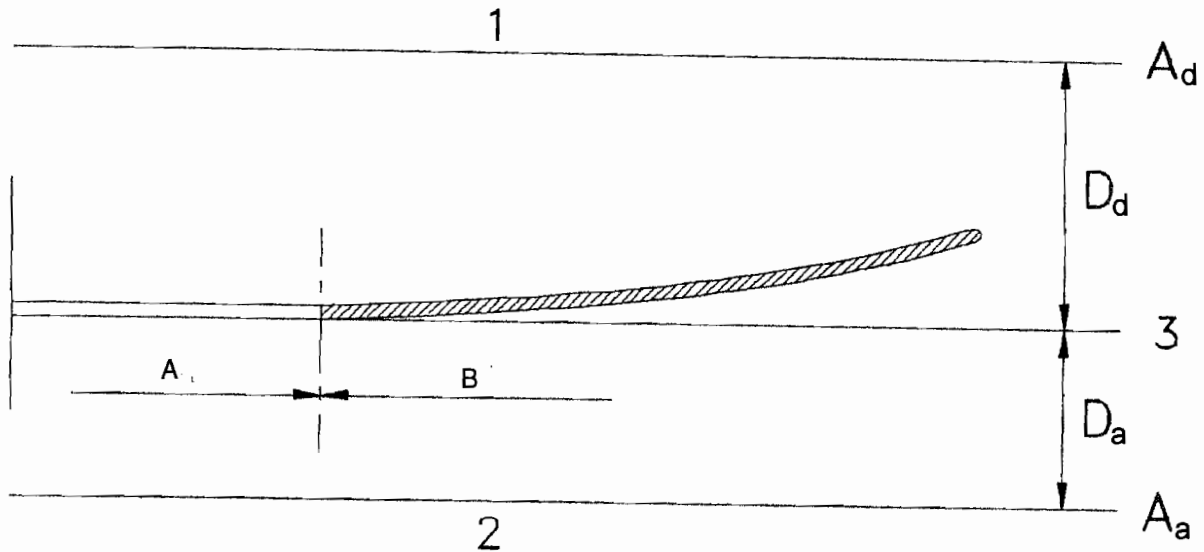

Key

- 1 Departure side
- 2 Approach side
- 3 Traffic face of barrier
- A Barrier
- B Terminal

Figure 4 – Terminal permanent displacement zones

5.5 Impact test acceptance criteria

5.5.1 General

For completion of a successful test the following impact acceptance criteria and measurement shall apply.

For different tests the vehicle post-impact trajectory shall be restricted by the following criteria:

- a) in the tests with approaches 1 and 2 no vehicle wheel track shall cross the lines of the exit box specified in Table 7 unless the velocity of the vehicle centre of mass is less than 10 % of the prescribed impact speed;
- b) in the tests with approaches 4 and 5 no vehicle wheel track shall cross the lines of the exit box specified in Table 7;
- c) in the test with approach 4 the vehicle shall remain on the approach side.

Table 7 – Exit box

Approach	Exit box control lines
1, 2	F, A, D
4, 5	A

The classes of terminals Z_1 , Z_2 , Z_3 and Z_4 shall be ranked according to the distances Z_a and Z_d given in Table 8 and shown in Figure 5.

Table 8 – Exit box dimensions Z_a and Z_d

Classes of Z	Approach Side Z_a (m)	Departure Side Z_d (m)
Z_1	4	4
Z_2	6	6
Z_3	4	no limit
Z_4	6	no limit

5.5.4 Severity Index

ASI, THIV and PHD shall be computed using at least the minimum amount of vehicle instrumentation as specified in 7.6. These values shall be quoted in the test report (see EN 1317-1:1998, clause 7).

The maximum values of ASI, THIV and PHD shall not exceed the values given in Table 5.

For a series of tests on a particular terminal, all resulting impact severity values shall be recorded in the test report, and the highest value shall determine the impact severity class.

6 Transitions

6.1 Performances classes

For transitions, the definitions and the classification of containment classes, acceptance tests, working width, dynamic deflection, severity index as well as acceptance criteria and test methods, shall be those specified in EN 1317-2.

With the exception of 6.2, the containment class of a transition shall not be lower than the lower nor higher than the higher containment class of the two connected barriers; its working width shall not be larger than the larger working width of the two connected barriers.

6.2 Removable barrier sections

A removable barrier section not longer than 40 m shall be tested as a single transition.

A removable barrier section longer than 40 m shall be considered a different barrier, connected to the normal barrier by two transitions.

-The barrier shall have passed the two tests specified in EN1317-2 relative to its class. The transition shall be tested as specified in clause 7.

If the removable barrier section is longer than 40 m but shorter than 70 m, the barriers shall be tested in the removable barrier section configuration, i.e. with the two transitions installed, and the impact point shall be 1/3 of the removable barrier section length. In this case test TB11 (see EN 1317-2) on this impact point may be omitted. The transition shall be tested as specified in clause 7.

The containment class of a removable barrier section may be lower than the containment class of the barrier, and the working width one class higher.

6.3 Critical impact requirements

6.3.1 General

For acceptance each transition shall pass two tests, as specified in EN 1317-2, one with a light vehicle for impact severity and another with a heavy vehicle for maximum containment.

The direction of impact as well as the impact point shall be chosen as the most critical for each test.

6.3.2 Critical impact direction

As the most critical direction of impact is from the softer to the stiffer barrier, then the impact direction shall be from the lower containment barrier toward the higher containment barrier, provided the latter has demonstrated the smaller dynamic deflection in the high containment test.

If the dynamic deflection of the higher containment barrier is higher than the dynamic deflection of the lower containment barrier the impact direction for each test shall be chosen by the test laboratory, and the justification for such choices shall be recorded in the test report.

If the two connected barriers have the same containment class, the impact direction shall be from the higher dynamic deflection to the lower.

6.3.3 Critical impact point

In general the impact point for the light vehicle shall be at a distance of 3/4 of the length L of the transition from the beginning of the transition, in the direction of impact.

The impact for the heavy vehicle point shall be the midpoint of the transition.

In special cases different choices of the critical impact point may be made by the test laboratory, and

ENV 1317-4:2001 (E)

shall be recorded with justification in the test report.

6.4 Impact test acceptance criteria

The impact test acceptance criteria for transitions are specified in EN 1317-2.

7 Test methods**7.1 Test site**

The test area shall be generally flat with a gradient not exceeding 2,5 %. It shall have a level hardened paved surface and shall be clear of standing water, ice or snow at the time of the test. It shall be of sufficient size to enable the test vehicle to be accelerated up to the required speed and controlled so that its approach to the safety barrier is stable.

To enable the vehicle exit characteristics to be evaluated, the paved area shall exceed 40 m in length beyond the expected break point and 15 m in front of the safety barrier line of vehicle contact with the safety barrier.

Appropriate measures shall be taken in order to minimize dust generation from the test area and the test vehicle during the impact test so that photographic records will not be obscured.

Appropriate measures shall be taken to ensure that in the exit area the test vehicle does not collide with any independent obstruction which could cause additional deformation of the test vehicle thereby precluding the accurate measurement of the vehicle cockpit deformation index (VCDI) (see EN 1317-1:1998, annex A).

7.2 Test vehicle**7.2.1 General**

The vehicles to be used in the tests shall be production models representative of the current traffic, having characteristics and dimensions within the vehicle specifications defined in EN 1317-1:1998, clause 5.

The tyres shall be inflated to the manufacturer's recommended pressures. The condition of the vehicle shall be such as to satisfy the requirements for the issue of a certificate of road worthiness in respect of tyres, suspension, wheel alignment and bodywork. No repairs or modifications shall be made that would alter the general characteristics of the vehicle. The vehicle shall be clean and mud or deposits which may cause dust on impact shall be removed prior to testing.

The vehicle shall not be restrained by the control of the steering or any other means during impact and whilst the vehicle is in the exit box as defined in Figure 5 (e.g. braking, antilock brakes, blocking or fixing).

7.2.2 Loading Conditions

All ballast weights shall be securely fixed to the vehicle in such a way as not to exceed the manufacturer's specifications for distribution of weight in the horizontal and vertical planes.

NOTE All fluids are included in the total inertial test mass.

7.3 The terminal and transition

7.3.1 General

Detailed descriptions and design specifications of the terminal/transition shall be included in the test report (see EN 1317-1:1998, clause 9), to enable verification of conformity, of the installed system to be tested, with the design specification.

7.3.2 Installation

The terminal and transition shall conform to the structural design details and with the system installation details as given in the design specification of the manufacturer.

7.3.3 Position of the impact point

The appropriate approach and impact point for the tests shall be in accordance with Figure 3 for terminals, and in 6.3 and 6.4 for transitions.

7.4 Procedures for recording test data

The following test characteristics shall be recorded.

a) Pre-test data:

- Mass of the vehicle and location of the centre of gravity of the vehicle in the test condition including added ballast (see ISO 10392).
- Interior and exterior photographs of the vehicle.
- Photographs of the position and construction of the terminal/transition.

NOTE It is recommended that the mass vehicle moments of inertia should be reported.

b) Test data:

- Vehicle speed at impact;
- Vehicle approach path;
- Vehicle rebound speed;
- Linear accelerations and angular velocities;
- Permanent deflection of the terminal/transition system;
- Vehicle rebound path;
- Dynamic deflection and/or working width of the terminal/transition as far as recommended, corrected to the nearest decimal point;
- Photographic records from high speed cine film cameras and/or high speed video cameras deployed in such a way to give a complete record of the vehicle response and terminal/transition behaviour, including deformation and deflections.

ENV 1317-4:2001 (E)

c) Post-test data:

- General damage and deformation of the test vehicle and that information which is necessary for the computation of VCDI (see EN 1317-1:1998, annex A).
- Damage to the terminal/transition.
- Still photographs to aid reporting.

7.5 Accuracies and tolerances of impact speeds and angles**7.5.1 Vehicle impact speed**

Vehicle impact speed shall be measured along the vehicle approach path no further than 6 m before the impact point. The overall accuracy of speed measurement shall be within $\pm 1,0\%$.

Impact speed shall be within a tolerance of ${}^{+7,0}_0\%$.

7.5.2 Vehicle approach angle

Vehicle approach angle shall be measured along the vehicle approach path no further than 6 m before the impact point by a suitable method. The overall accuracy shall be within $\pm 0,5^\circ$.

Impact angle shall be within a tolerance of ${}^{+1,5}_-1^\circ$.

For approach 5 (see Figure 3) the actual impact angle is $180^\circ - 165^\circ = 15^\circ$. Then the acceptable limits of the approach angle are

$$165^\circ \begin{cases} +1^\circ & 166^\circ \\ -1,5^\circ & 163,5^\circ \end{cases}$$

7.5.3 Vehicle exit speed


Vehicle exit speed shall be measured with an accuracy of ± 5 km/h.

7.5.4 Combined tolerances of speed and angle

To avoid large differences of impact energy, the maximum tolerance for speed and angle shall not be combined. At the upper angle tolerance of $+1,5^\circ$ the upper speed tolerance shall be reduced to $+5\%$, and at the angle tolerance of $-1,0^\circ$ the lower speed tolerance is increased to $+2\%$.

NOTE The complete combined tolerance envelope is shown in Figure 6.

The given tolerances only serve to take account of different test installations or test procedures and are not intended to provide a spectrum from which the energy of the test may be chosen. In any case, the nominal values of Table 1 shall be taken.

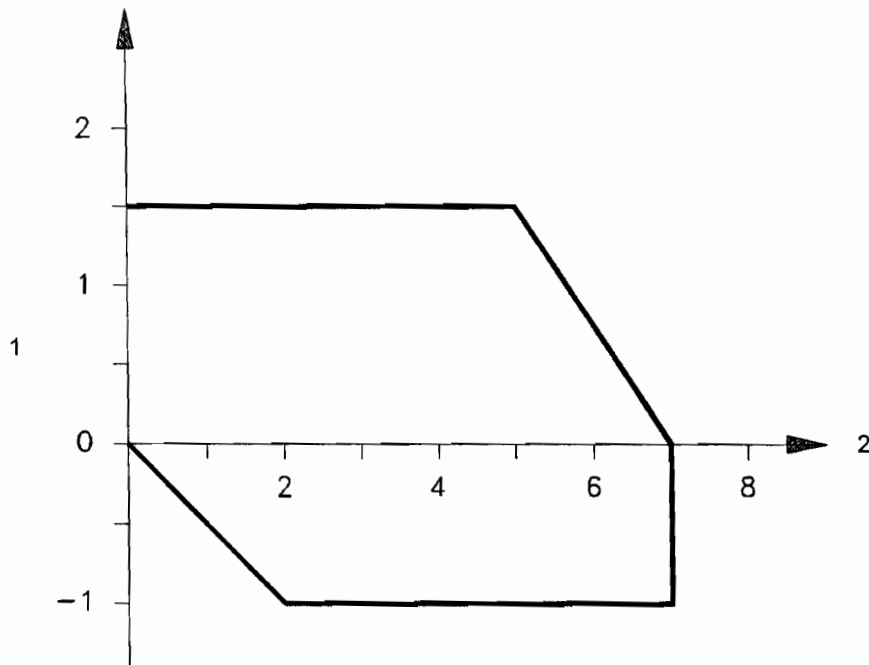**Key**

- 1 Angle [°]
- 2 Speed [%]

Figure 6 – Envelope of combined tolerances**7.5.5 Vehicle impact point**

The lateral displacement of the vehicle approach path shall be measured with an accuracy of $\pm 0,05$ m by a suitable method. The permitted tolerance for the lateral displacement of the vehicle path from its true direction shall be less than $\pm 0,15$ m at the moment of contact.

7.6 Vehicle instrumentation

The minimum vehicle instrumentation for recording linear accelerations and angular velocities, consists of a set of three linear acceleration transducers, mutually orthogonal, aligned with the vehicle axis (longitudinal, transversal and vertical), plus one angular rate transducer to record yaw rate.

The three accelerometers and the yaw rate sensor should be mounted on a common block and placed as close to the vehicle centre of gravity as practical. If this cannot be achieved, reference should be made to EN 1317-1:1998, clause 6.

Acceleration and angular velocity transducers and the relevant recording channels shall conform to ISO 6487, the frequency class being CFC 180.


NOTE CFC 60 should be used for plotting graphical results.

7.7 Photographic coverage

Photographic coverage shall be sufficient to describe clearly terminal/transition and vehicle motion during and after impact.

High speed cameras and/or high speed video cameras shall be operated at a minimum of 200 frames per second.

High speed cameras and one normal speed camera shall be located to record the performance of the terminal/transition. For the recommended camera schedule see Figure 7.

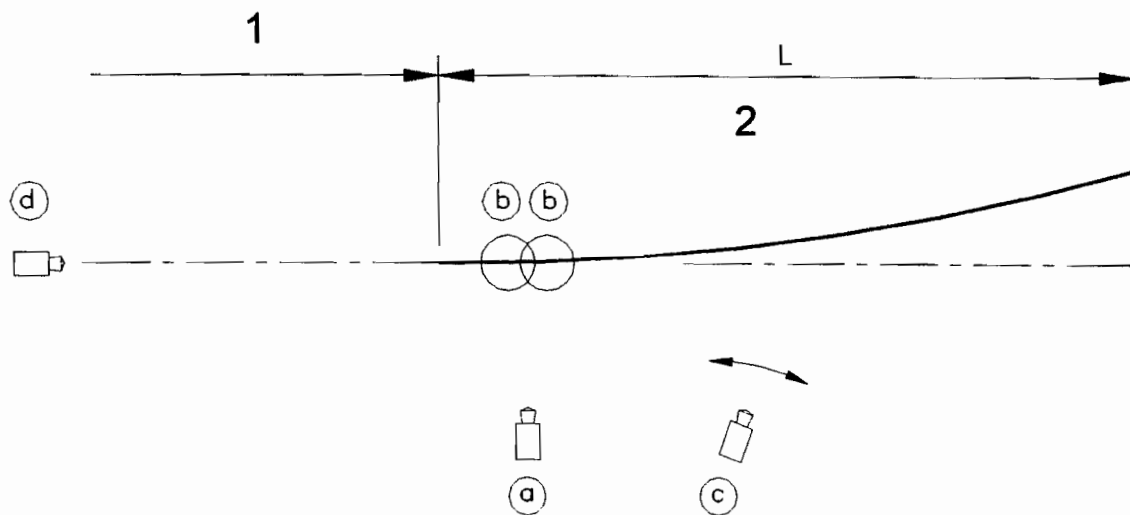

Key

- 1 Barrier
- 2 Terminal

- a) One high speed camera looking normal to the terminal/transition centre line.
- b) One or two overhead high speed cameras, located in a way to cover the vehicle motion from at least 6 m before the impact point to a distance to record the performance of the terminal/transition.
- c) One panned camera at normal speed sited at right angles to the path of the vehicle.
- d) (Optional) One high speed camera looking from a position behind the impact point in order to record the vehicle roll, vertical lift, penetration and sequence of action as the terminal/transition is struck.

Figure 7 - Layout of cameras for recording tests

7.8 Test report

The test report shall conform to EN 1317-1:1998, clause 9.

Bibliography

EN 1317-3, *Road Restraint Systems - Part 3: Performance classes, impact test acceptance criteria and test methods for crash cushions.*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.

Draft for comments only — Not to be cited as East African Standard